

huperRemote bViewer (Keypad Version)

Quick Guide

huperRemote bViewer for keypad supports online video surveillance for BlackBerry mobile phones with keypad. Remote users can easily operate video surveillance systems, like video camera monitoring, and PTZ camera control as on the computer. huperRemote bViewer offers single split screen view, one touch snapshot, and on-screen PTZ control.


Installing huperRemote bViewer for keypad

Modify Video Port Setting


Please make sure the surveillance system is huperVision v.1.53 or above before using huperRemote bViewer for keypad.

Follow the steps below to adjust video port setting:

- Press hammer button, and select preferences from pop-up menu.
- Switch to Network tab, select the video port 18083 in the list of Video server group box and Press Modify button.

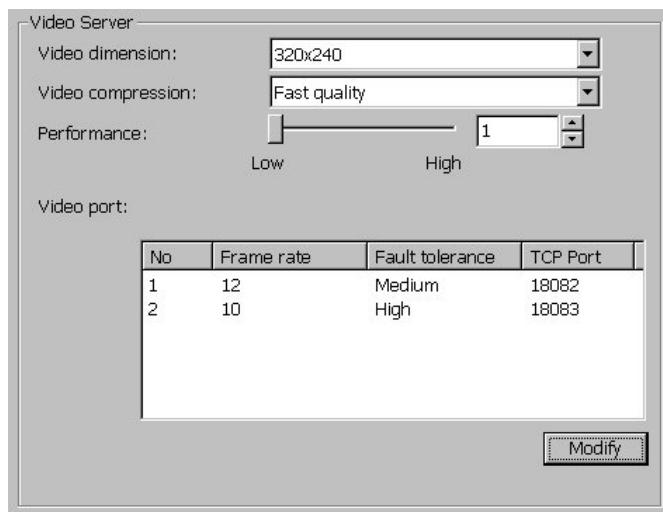

- Modify the value of frame rate as 5 (recommended value).

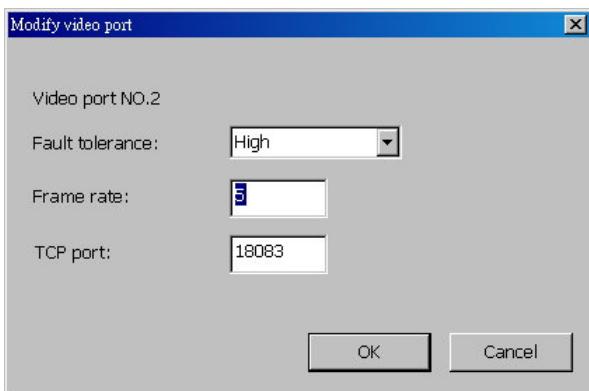


Check Platform Version

Follow the steps below to check BlackBerry OS version:

- Select Options in the application list



- Select About from the option list

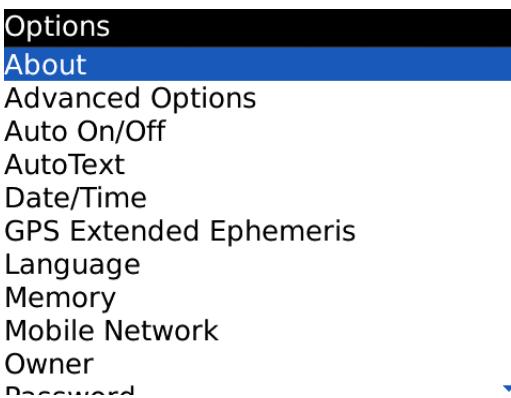

- Check the platform version number


 BlackBerry.

BlackBerry® 9630
Smartphone (3G, CDMA)
v4.7.1.40 (Platform)
Cryptographic Kernel v3.8.5.51
Branding Version: 1.0.255.10
Micro Edition Configuration: CLDC-1.1
Micro Edition Profile: MIDP-2.0
Micro Edition JTWI Version: 1.0


Install bViewer

Please follow the steps below to install huperRemote bViewer for keypad:


- Download huperRemote bViewer for keypad from huperlab website
<http://www.huperlab.com/english/support/update/update.htm>
Extract the downloaded file into a folder and there should be two files ~ bViewer.alx and bViewer.cod.
Note: Download version 4.7 for platform version or above, otherwise please download version 4.5.
- Run BlackBerry Desktop Manager. If you don't install BlackBerry Desktop Manager in your PC, please download from <http://na.blackberry.com/eng/services/desktop/> and install it.
- Connect your BlackBerry to PC and select "Application Loader".

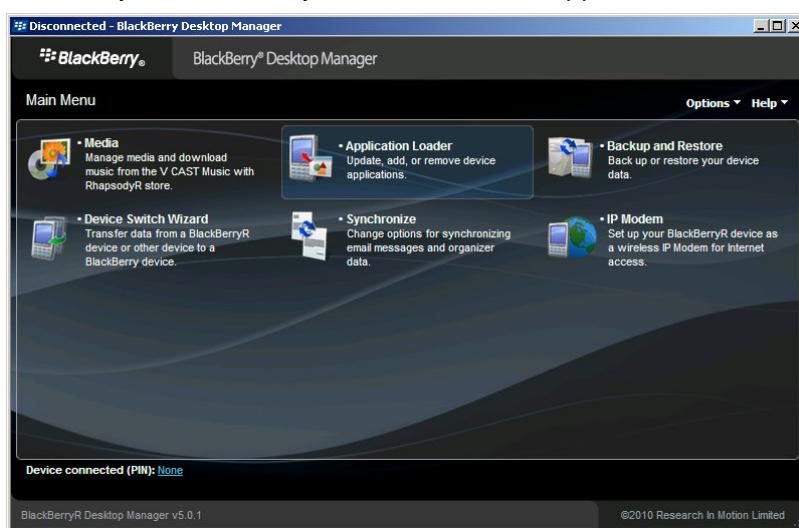


- Click Start button to Add/Remove Applications.

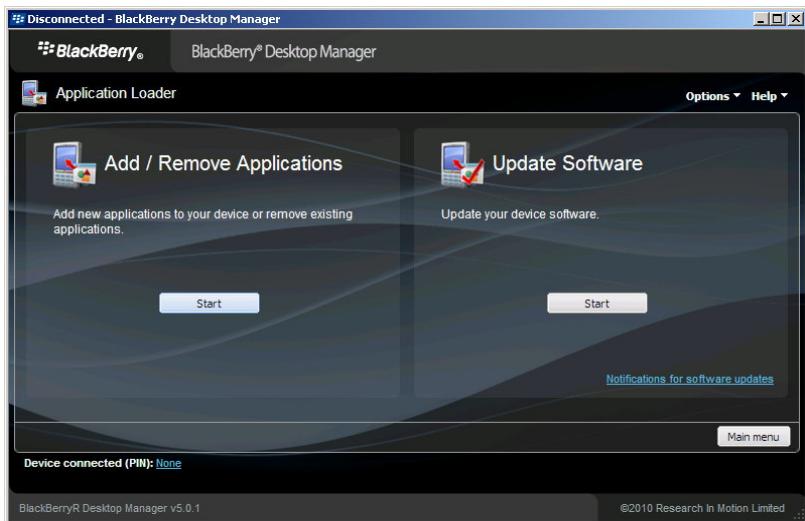


- Click Browse button to select file "bViewer.alk" in the folder where you extract the program.

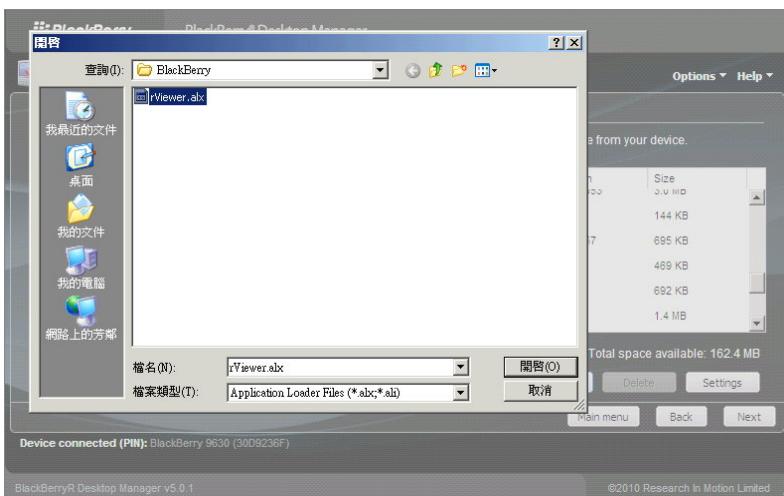


- Click Next button to confirm install application.

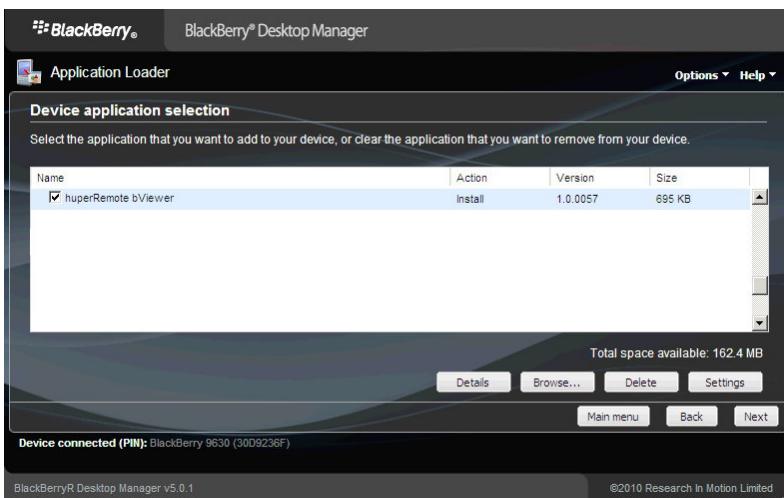

- Click Finish button to start installation.

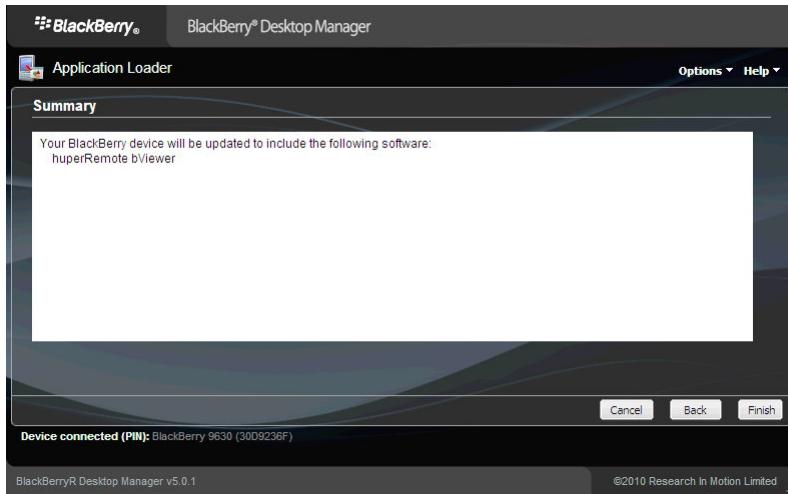


- The installation is successful when you see this message. And you can now start to use huperRemote bViewer for keypad.

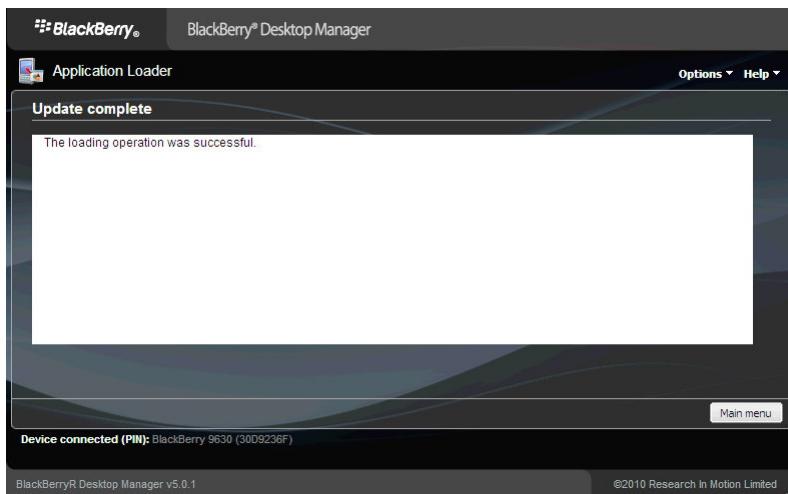

Using huperRemote bViewer for keypad



Start program from downloads folder by touching  to launch the bViewer program.

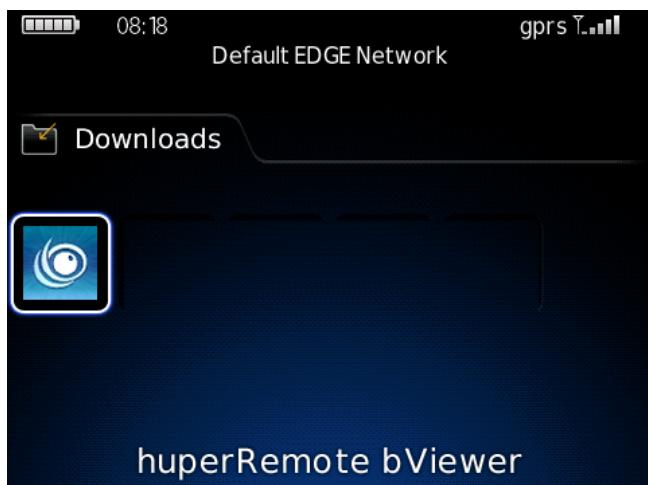

- Navigate the menu icon with track ball or track wheel, and click to do action menu icon.



Main menu



	Connect / Disconnect	Click to connect remote site according to link settings or disconnect current connected site
	Previous camera	Switch to previous camera
	Next camera	Switch to next camera
	Show / hide information	Show/hide video information display on screen
	Snapshot	Click to save current video as an image file
	PTZ menu	Click to display PTZ menu
	Link settings	Click to add, modify or delete remote link settings

PTZ menu



	Pan left	Click to move PTZ camera left
	Pan right	Click to move PTZ camera right
	Tilt up	Click to move PTZ camera up
	Tilt down	Click to move PTZ camera down
	Zoom in	Click to zoom in video display
	Zoom out	Click to zoom out video display
	Preset menu	Go to Preset sub-menu
	Back	Back to main menu

PTZ preset menu



 P1	Go to preset point #1
 P2	Go to preset point #2
 P3	Go to preset point #3
 P4	Go to preset point #4
 P5	Go to preset point #5
 P6	Go to preset point #6
 P7	Go to preset point #7
 P8	Go to preset point #8
 Back	Back to PTZ menu

Copyright

© 2010 Huper Laboratories CO., LTD. All rights reserved.

The trademarks mentioned in the manual are legally registered to their respective companies.

Notice

The written content provided with this product is the property of huperLab.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without huperLab's prior written permission. Specifications and features are subject to change without prior notice.

For more product details, please click onto huperLab's website at www.huperlab.com